

MONTAŽNA KUTIJA JE NAPUNJENA POTREBNOM
KOLIČINOM GELA KOJI NE MENJA SVOJSTVO.



Predstavnik za Srbiju, Makedoniju i Crnu Goru:

EL-CO

Backa Palanka

Trg Oslobođenja br.8

Tel. +381 21 / 751-174, 6044-218, 754-650, 754-649

e-mail: el-co@nadlanu.com

[http:// www.el-co.rs](http://www.el-co.rs)



ETELEC S.p.A.

Via D.De Roberto, 44-80143 Naples - Italy

tel. +39 081 5846610 Fax: +39 081 2587166

e-mail: etelec@etelec.it

[http:// www.etelec.it](http://www.etelec.it)

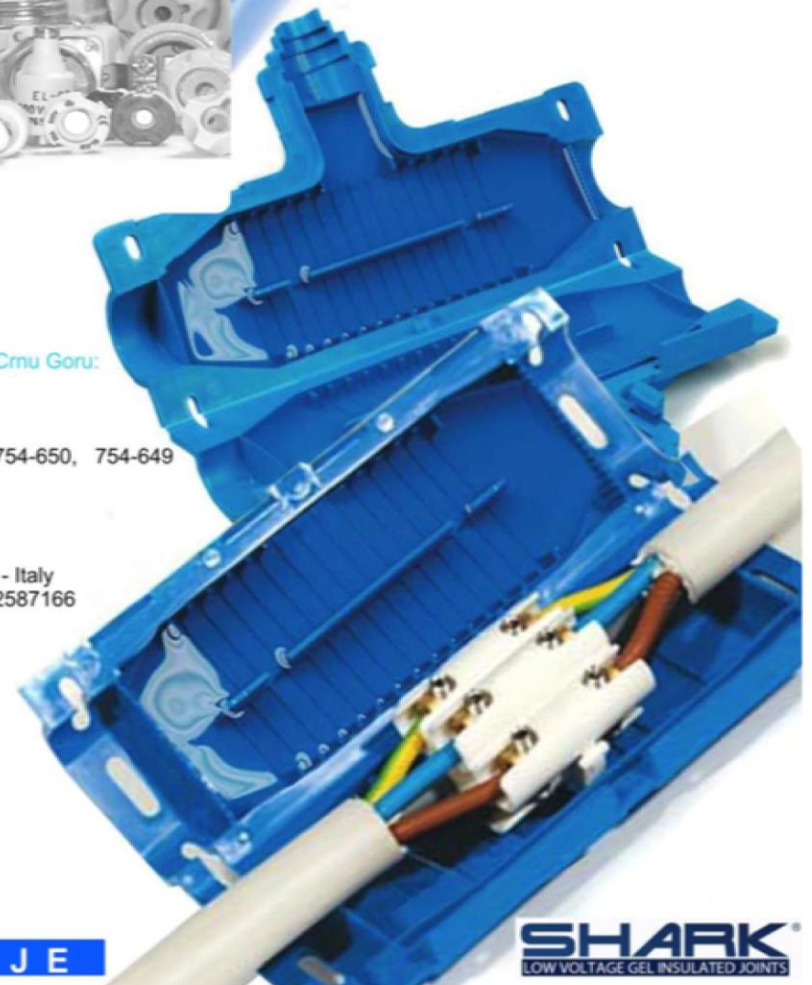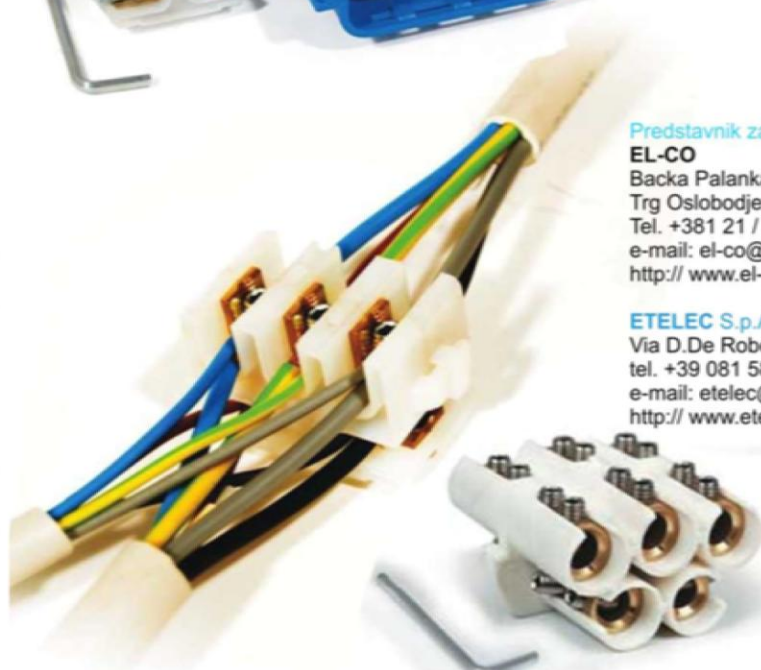

NAŠA IDEJA

VAŠE REŠENJE

SHARK
LOW VOLTAGE GEL INSULATED JOINTS



RAVNO SPAJANJE

SPAJANJE GRANANJEM

SHARK 125-150
CLASSIC LINE



NEW

SHARK 406/S - 410/S - 416/S
CLASSIC LINE



SHARK 506 - 516
SERIES 500



NEW

SHARK 150Y
SERIES 500



NEW



SHARK 125 - 150
CLASSIC LINE


NEW

SHARK 516Y - 535Y
SERIES 500




SHARK 406 - 410 - 416
CLASSIC LINE

SHARK 425 - 435
SERIES 400




RAVNO SPAJANJE JEDNOŽILNOG KABLA




RAVNO SPAJANJE ČETVOROŽILNOG KABLA




RAVNO SPAJANJE PETOŽILNOG KABLA



ELEMENTI ZA GRANANJE KABLA
POD UGLOM 30 STEPENI




ELEMENTI ZA PARELELNO
GRANANJE KABLA



ELEMENTI ZA GRANANJE VIŠEŽILNOG
KABLA POD UGLOM 30 STEPENI



MULTIŽILNO PARELELNO GRANANJE
KABLOVA DO 4 ŽILE



VIŠEŽILNO GRANANJE
KABLA PO 90 STEPENI

Tehničke karakteristike

u saglasnosti sa standardom CEI EN 50393 (IMQ odobren sertifikat CA01-00297, CA01-00298).

Samogasivost u saglasnosti sa EN60695-2-11, niska emisija dima i gasova u saglasnosti sa standardom CEI-20-37/2-1 i CEI 20-37/7.

U saglasnosti sa Directive Rohs 2002/95/CE (ograničenje upotrebe određenih opasnih materija u elektro uređajima i sastavnim delovima).

mesingani mehanički konektor sadrže modeli SHARK 125 i SHARK 150 operativni opseg temperature: -20°C do + 90 °C

ICE 505 (zaštita od vode do jedan metar visine)